



# Investigation on the Potential of OSL for Dating Qanat in the Dasht-e Bayaz Region of Northeastern Iran Using the SAR Protocol for Quartz

M. Fattahi<sup>1</sup>, A. Aqazadeh<sup>2</sup>, R.T. Walker<sup>3</sup>, M. Talebian<sup>4</sup>, R.A. Sloan<sup>5</sup>, and M.M. Khatib<sup>6</sup>

1. Associate Professor, Oxford University Center for the Environment, South Parks Road, Oxford, UK, \* Corresponding Author; email: morteza.fattahi@ouce.ox.ac.uk
2. MSc. Geophysics, Institute of Geophysics, University of Tehran, Tehran, Iran
3. Associate Professor, Department of Earth Sciences, University of Oxford, Oxford, UK
4. Associate Professor, Geological Survey of Iran, Tehran, Iran
5. PhD. Researcher, Bullard Laboratories, University of Cambridge, Cambridge, CB3 0EZ, UK
6. Associate Professor, Department of Geology, Birjand University, Birjand, Iran

## ABSTRACT

*In some parts of Iran, such as Dasht-e-Bayaz, the line of wells of the Qanat systems have been displaced by coseismic faulting. If we can date the age of these Qanat wells and measure the amount of offset, we will be able to estimate the slip-rate of the fault. The existing constraints on age of ancient Qanats in Iran are typically assigned from archaeological investigations of nearby habitation sites. We present for the first time the results of OSL dating from spoil deposits associated with the Dasht-e-Bayaz Qanat. We further explore the possibility of dating Qanat directly using the novel method of OSL. The minimum ages which are assigned to maintenance and construction of Dasht-e-Bayaz Qanat, using SAR protocol are  $15.8 \pm 1.6$  ka and  $22.1 \pm 2.7$  ka, respectively. Archeological investigations suggest that the Qanat ages are much younger than ages obtained by OSL. We present evidence that the SAR approach that we have chosen is operative but not relevant. The OSL method has provided ages that are consistent with stratigraphic layers in the well, but these layers were not fully bleached during construction. The single aliquot method to which dim samples we've applied in the recent research is not an efficacious way to achieve the age of Qanats and may need to test for more samples.*

### Keywords:

Qanat; OSL dating;  
Dasht-e-Bayaz Fault;  
SAR

## 1. Introduction

Iran is tectonically active, accommodating N-S convergence between Arabia and Eurasia [1]. Eastern and northwestern of Iran, are the regions which are known for most surface faulting in whole plateau [2]. The total amount of  $30 \text{ mmyr}^{-1}$  of Arabia-Eurasia convergence [3] acts different in east and west of Iran. According to Vernant et al [4] most of the shortening east of  $58^\circ\text{E}$  is accommodated by Makran subduction zone ( $\sim 19.5 \pm 2 \text{ mmyr}^{-1}$ ), and least by Kope Dagh ( $\sim 6.5 \pm 2 \text{ mmyr}^{-1}$ ). Therefore, the amount of convergence in eastern Iran should be something more than that of Kope Dagh. This shortening is thought to be accommodated by left-lateral strike-slip faults in


north-eastern Iran [5]. The strike-slip faults, which can be over  $100 \text{ km}$  in length, have produced several large earthquakes over the last century [6] and are important elements in deformation of the continents [5]. Within NE Iran, because of large and no-deep seismic events, active faulting changes the topography and drainage patterns on the surface, and the geomorphology is able to retain information about fault evolution over relatively thousands of years [5]. In eastern Iran, the main structures are Dorouneh and Dasht-e-Bayaz left-lateral strike-slip faults, which construct the northern part of namely Lut zone, eastern Iran, see Figure (1a). The east and west margins of Lut zone, respectively Nehbandan

and Nayband strike-slip faults, have right-lateral shear of  $10\text{-}12\text{mmyr}^{-1}$ , north-southward. It is believed that such a NS right-lateral shear is accommodated in eastern Iran by rotating counterclockwise [5], which caused mainly by left-lateral shear of Dorouneh and Dasht-e-Bayaz systems.

The Dasht-e-Bayaz strike-slip fault in Khorasan province, north-eastern Iran, is one of the dominant seismogenic faults in the Iranian plateau [7]. Although, records of events in Dasht-e-Bayaz fault system are not as quantitative as other seismic region (like Zagros and Alborz) in Iran, it has produced large and destructive earthquakes of Lut zone, in both historical [8] and instrumental [9] records, see Figure 1(b). Recently, two major earthquakes in this region (1968 August 31, Dasht-e-Bayaz and 1979 November 27 Khuli-Buniabad with  $M \geq 7$ ) have attracted attention to this active fault. Particularly, after the August 31, 1968 earthquake, because of sharp ruptures on surface, many researchers represented field reports and explorations [9-10]. It also enabled other seismologists to calculate the mechanism of source parameters [6, 11]. However, lack of seismic data, and complexity of region (bending with Ferdow thrust and Abiz right-lateral strike-slip fault) prevents of detailed explanation of fault's behavior. It is also suggested that due to small offset on the whole fault system, in comparison to total amount of Tertiary deformation in this

region, Dasht-e-Bayaz left-lateral strike-slip fault is relatively young structure [6]. Therefore, we choose to investigate the Holocene activity of this region, by studying manmade tunneling artifacts called Qanats that have preserved their structural characteristics for thousands of years after their creation, in order to figure out the last event occurred in region. The presence of faults provides unexpected resources useful for continual human habitation by producing a reliable water supply and this, in turn, supports agriculture for settlement and sustenance.

The Iranian plateau is an arid land with a low annual rainfall. According to groundwater resources of the world [12], Iran is largely desert and with the exception of the northwestern provinces and along the southern shores of the Caspian Sea, receives only 6 to 10 inches of rainfall per year [13], which is less than 30 percent of the global average of annual rainfall. Additionally, more than 60 percent of the total precipitation evaporates, and only about 15 percent reaches the surface. Because of this lack of significant rainfall, groundwater resources are of great importance in Iran. In fact, in recent decades it has become evident that groundwater is one of the most important and most vulnerable of earth's natural resources [14]. Although, most people of the world dig wells to reach the groundwater table, some ingenious ancient people find a more innovative and lasting method for extracting groundwater.

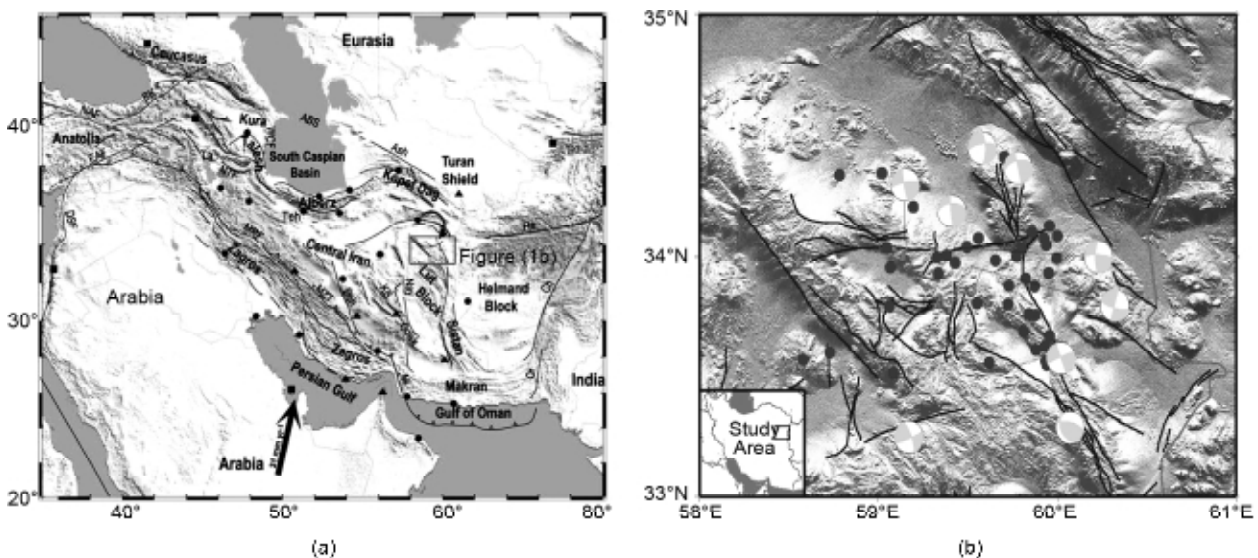


**Figure 1.** (a) Simplified tectonic map of Iran within the Middle East region superimposed on topography. The heavy arrow shows NUVEL-1A plate motion relative to Eurasia [4]. Lut zone and its position in eastern Iran are shown. The box displays the region of Figure 1(b). Scheme is from Vernant et al [4]. (b) Part of eastern Iran included the Dasht-e-Bayaz fault system on topography. Ferdows thrust and Abiz right-lateral strike-slip fault have complex bending with Dasht-e-Bayaz. Epicenters of earthquakes from 1960-2007 were taken from ISC catalog. Fault plane solutions are from the data of CMT Harvard.

## 2. Application of Qanats

Range front faults in the mountainous region sometimes cause a damming effect on the local water table. This is because the grinding of rock on the trace of an active fault creates very fine impermeable clay, known as “fault gouge”. This layer acts as an underground dam that impedes the flow of water and causes the water table to rise up the gradient of the fault trace [15]. In this case, the fault is responsible for the subsurface aquifer of the lake beds, and ensures their continual uplift and elevation above the plain, causing the formation of springs [15]. We know that alluvial fans are the most appropriate for habitants, due to fertility, but only if water is available. That is the case which some people decide to transfer water from piedmont region to their settlement, see Figure (2). This situation is typical in Iran. The country is mountainous except for flat regions in the interior, which are barren salt flats [15]. The most widespread landscape in central Iran is Great Kavir, which acts as a reservoir for groundwater on its boundaries. Almost all of the Qanat systems of Iran are found associated with large alluvial fans in the piedmont zone between the high mountains and the kavir or salt desert, or in large alluvial valleys on the desert margin [16]. This shows an interesting overlap between active faults and evidences of Qanats. One can infer the existence of fault plane by the evidence of Qanat craters.

The indigenous Iranians utilized a groundwater extraction and an irrigation management system called Qanat. It mainly consists of a gently sloping tunnel to convey water from uplifted dam of fault plane to further center of habitat, see Figure (2).

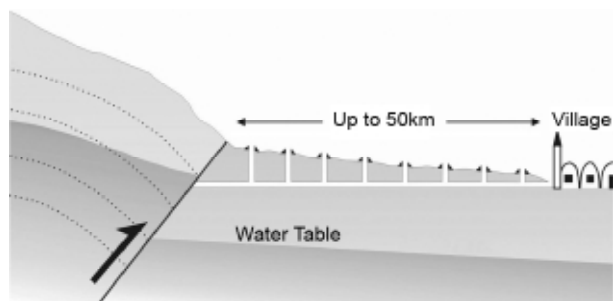

**Figure 2.** Sketch of an irrigation tunnel (Qanat) dug through alluvium towards a range-front, where the water-table is elevated because of impermeable clay ('gouge') on a thrust fault. Qanats can be up to 100m deep at the range front, and have many vertical shafts for ventilation and further maintenance. Scheme is from Jackson [15].

English [17] states that Qanats appear to have originated in the vicinity of Armenia more than 2500 years ago and spread rapidly throughout south-west Asia and north Africa during Achaemenid times (550 to 331 B.C.). Certainly, by 209 B.C. Qanats were an important feature of the Persian landscape and were described by Polybius during the campaign of Antiochus against Arsaces [18]. Considerable research has been done on the Qanat system, especially after the 2003 December 26 Bam earthquake which brought world attention to the immense body of that region's hydrogeological, archaeological and geo-historical cultural artifacts [15].

The Qanat is an engineering invention for developing and supplying groundwater to distal parts of the alluvial fan from its proximal head source, which cut through alluvial material, and drains water by gravity from beneath the water table at its upper end to a ground surface outlet and irrigation canal at its lower end [16]. The Qanat design was so simple and effective that it was adopted in many other arid regions of the Middle East and around the Mediterranean [13]. The underground tunnel is connected to the surface by a series of vertical shafts, which can be seen on aerial photos. These vertical shafts would have provided access for ventilation and removal of excavated material during construction. The development of the Qanat technology may reflect the response of the ancient people to the climatic changes, which are inferred by archeologists to have occurred in Iranian territory about several thousand years ago. The most developed systems of Qanat irrigation are found exclusively through coarse alluvial sand and gravel, such that the bed of the Qanat often has very high permeability [18], and in fact, large quantities of water would remain useless or lost by infiltration and percolation, until Qanat discovery. Qanats are strongly controlled by the availability of groundwater resources which are usually fed by streams and rivers emerging from the highland areas which have greater rainfall. As a result, most of the Qanat systems of Iran are found in the Central Plateau groundwater province of Iran [19], which is the surrounding peripheral zone of Great Kavir in central Iran. This zone is located by the major active faults of the region owing to the favorable hydrologic conditions produced by the aquifer damming effect.

Qanat technology exists in more than 34 coun-


tries in the world [14]. Actually, the first documented Qanats were dug in the north-western areas of Iran and date back to 800 B.C. [18, 20]. Wulff [13] estimated the antiquity of Qanat in Iran by 3000 years. These verifications are often achieved by historical records or occasionally by inscriptions within the tunnels preserved as archeological evidence. Nevertheless, most of the evidence we have for the age of Qanat is only circumstantial, and therefore, the precise dating of Qanats is a difficult but important requirement of answering the question of the Qanat antiquity. The development of technology for resolving measurements on original creation ages of various artifacts has been accompanied with enough progress that we can begin to sample and systematically place reproducible dates to many events or artifacts.

As mentioned above, many of the Qanat galleries were dug in the vicinity of, or directly upon, active faults. This has been explored by some researchers in understanding and interpretation of seismologic behavior [21-22]. Qanat offers a useful tool for paleoseismologists and archeoseismologists, because in some cases there are no direct records of seismic events, and even the displacement of the fault is covered or concealed due to erosion or anthropologic development. Some have suggested that tectonic displacement would offset the tunnels of the Qanat system and would require the construction of a new tunnel. The reconstructed tunnels would preserve a record of tectonic displacement. By measuring the offset between new shafts and old shafts, and determining the age of the offset features, the estimation of fault slip-rate -which is an important element in hazard assessment - becomes possible. We determined the antiquity of Qanat constructions using the novel method of optically stimulated luminescence (*OSL*) which has yet to be used on these features. We explore whether or not the *OSL* method can be used in such studies and if the results are reliable. The Dasht-e-Bayaz region has been previously studied by our group [23] and there would be good criteria for interpretation of the results of dating the Qanat systems. Here, we report the preliminary results of our attempt to date one Qanat assemblage which was displaced by the Dasht-e-Bayaz fault.

### 3. OSL Sampling and Experimental Treatment

After the August 31, 1968 earthquake of Dasht-

e-Bayaz ( $M_w 7.1$ ), which caused about 12000 people death, Ambraseys and Tchalenko [9] made a report of the field ruptures and structural damage. Although they reported length of rupture about 80km, further studies indicated some segments of about 20km on the fault [13]. One of the brightest offsets Ambraseys captured was the displacement in line of craters of a Qanat which crossed by fault rupture, see Figure (3). Figure (3), the aerial photo taken by Ambraseys after August 31, 1968, shows the offset of at least 10m [9] on the elder generation of Qanats. One can assume that after the earlier event, which might be as far back as ninth century A.D., according to Ambraseys and Tchalenko [9], or even much earlier, shifted shafts dried out and thus abandoned. This led the habitants to generate new shafts, which could trigger water resources from newly cracked bed rock. Another line of Qanat pursues exactly the line of fault rupture to enrich the water supply to main Qanat [15]. As the old generation of Qanat excavated certainly before the last earthquake, we choose them as a sampling location, so the age of samples tell us the nearest time of early earthquake. Therefore, samples were taken from abandoned shaft, see Figure (3). A trench through the well surface (at 34:02:01.3N

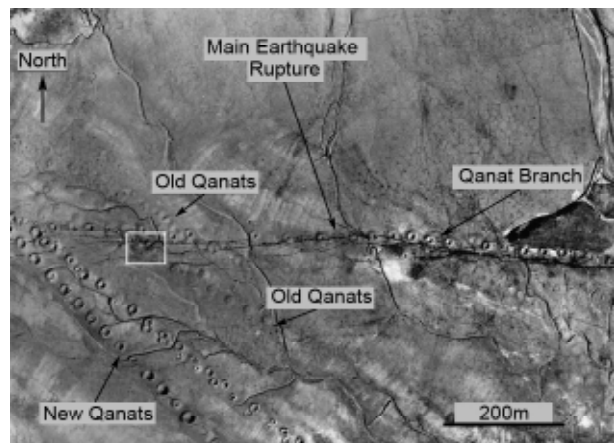

**Figure 3.** Air photo of Qanats in the Nimbluk valley, taken after the 1968 Dasht-e-Bayaz earthquake. The earthquake fault rupture runs east-west across the center of the picture and moved horizontally, with the north side sliding to the west. Multiple generations of Qanats are visible, the most recent were cut by the 1968 faulting, but these were replacements for earlier Qanats, whose lines of craters are now heavily eroded, that were presumably abandoned after earlier earthquakes. One Qanat follows precisely the line of the fault rupture, increasing the water flow into the main northwest-southeast Qanats by tapping an underground change in water-level, ponded by impermeable clay gouge on the fault [8]. The white box shows the location of current sampling. Photo courtesy of N. Ambraseys.

58:49:08.0E 1559m from Dasht-e-Bayaze in NE Iran) revealed three layers as expected. The detailed geological setting; trench site, excavation, stratigraphy and interpretations will be presented in future publications. Therefore, three samples were taken from a shaft, going deep vertically into a trench. GPS coordinates of samples are displayed in Table (1).


**Table 1.** Sample data frp, Dasht-e-Bayaz Qanat.

Sample Code	Lat.	Long.	Depth in Trench (m)	Elev. from Sea Level (m)
Gh1	34:02:01.3N	58:49:08.0E	0.35	1559
Gh2	34:02:01.3N	58:49:08.0E	0.40	1559
Gh3	34:02:01.3N	58:49:08.0E	0.75	1559

However, this three layers structure over surface was anticipated according to archeologists. Wulff [13] discussed the process of digging Qanat comprehensively. During the construction of a Qanat well, excavated sediment is transferred from the well tunnel and poured on the surface around the well. We assume that thousands of years ago, before the development of strong artificial light, digging Qanat should have happened only during the day time, see Figure (4a). Therefore, sediments that had been removed from the underground tunnel during the construction would have been spread around the well's surface should have been exposed to day light for long intervals of time. As a result, the luminescence signal of the dosimeters inside these sediments should have been totally or partially bleached due to sunlight exposure.

In addition, people have cleaned and repaired the Qanats, decades or centuries or thousands of years later. During maintenance, the well shaft would have been used to transfer the sediment from the Qanat to the earth surface [13]. The same scenario for both construction and maintenance would have been utilized, and the sediment and the mineral grains used in luminescence dating would have been exposed to light. Therefore, it can be assumed that around the well surface we would find three well-defined layers. The bottom layer should be the natural surface before digging the well, which we call it "paleosol". On top of that, there should be a layer that contains sediment that belongs to original construction period, and the very topmost layer should be related to maintenance, whether the maintenance occurred in one or several stages, see Figure (4b). Based on this scenario, it may be possible to date the time of construction as well as maintenance of the Qanat well.

Although there were many candidate wells in the area, we chose one of the oldest ones, hypothesizing that we understood and studied it well enough to know that its construction occurred before the last episode of tectonic activity. Therefore, if we can date the time of construction of this well, we can use it for minimum slip-rate determination on the fault. From the historical sagas (as Wulff 1968 mentioned) and what local "moqanni"s (the local term for Qanat excavators) mentioned, it is found that the uppermost layer of silty sand deposits is presumably related to maintenance, see Figure (4b). Therefore, the age of these sediments can also provide a valuable constraint

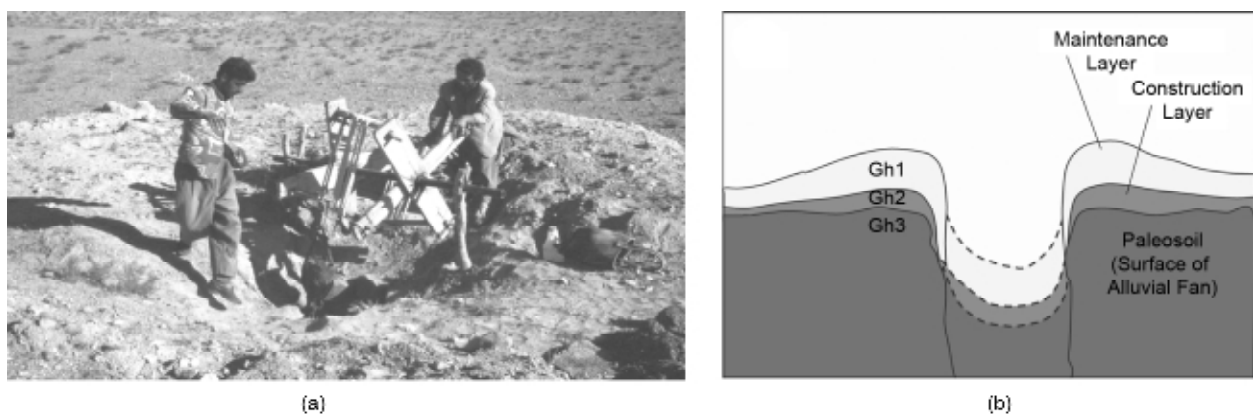


**Figure 4.** (a) A windlass working at a vertical Qanat shaft, bringing excavated material to the surface from an underground worker below. The discarded material forms a crater rim at the surface, preventing flash-floods from washing material back into the hole [15]. Workers always work in daylight. (b) Sketch of hole crater of Qanat shaft, which buried after abandonment. Three major layers from ground of alluvial fan (paleosol) which samples taken, are indicated. The Gh1, Gh2 and Gh3 relate to maintenance, construction and paleosol layers, respectively.

on the last faulting event on the Dasht-e-Bayaz fault. When combined with estimates of the displacement, the ages can provide information on the slip-rate of the fault which can be used to estimate earthquake recurrence intervals.

One sample (*Gh1*) was collected from the uppermost layer of this trench which, if it had been completely reset during deposition from maintenance, should date pre-faulting, see Figure (5). Another sample (*Gh2*) was collected from the middle layer (construction of well) which if the sediment had been completely reset during deposition would date prior to Qanat maintenance and subsequent faulting. The last sample (*Gh3*) was collected from the bottom layer (surface of well) for stratigraphic control and should date the surface of the alluvial fan.

The samples were collected using stainless steel tubes (5 cm by 25 cm) and both ends were sealed and

covered using both aluminum foil and black tape. The samples were opened in the laboratory under red light conditions, and 5 cm of each end were extracted before OSL pretreatments, because the ends were presumably exposed to light during sampling. This extra material was used to determine sample moisture content. Elemental concentrations were calculated via in situ Gamma spect. The middle part (light unexposed) was used for determination of the equivalent dose ( $D_e$ ). The Single Aliquot Regenerative (SAR) dose protocol for quartz (15) was applied to aliquots of 90-150  $\mu\text{m}$  sized quartz, and these were prepared by wet sieving, HCL and  $\text{H}_2\text{O}_2$  treatment, followed by heavy liquid separation ( $<2.7\text{g}/\text{cm}^3$ ), HF and HCL treatment, and checked with IR (infrared) stimulation for feldspar contamination during analyses. All the experiments reported here were carried out using a Rixø TL-DA-15 automated

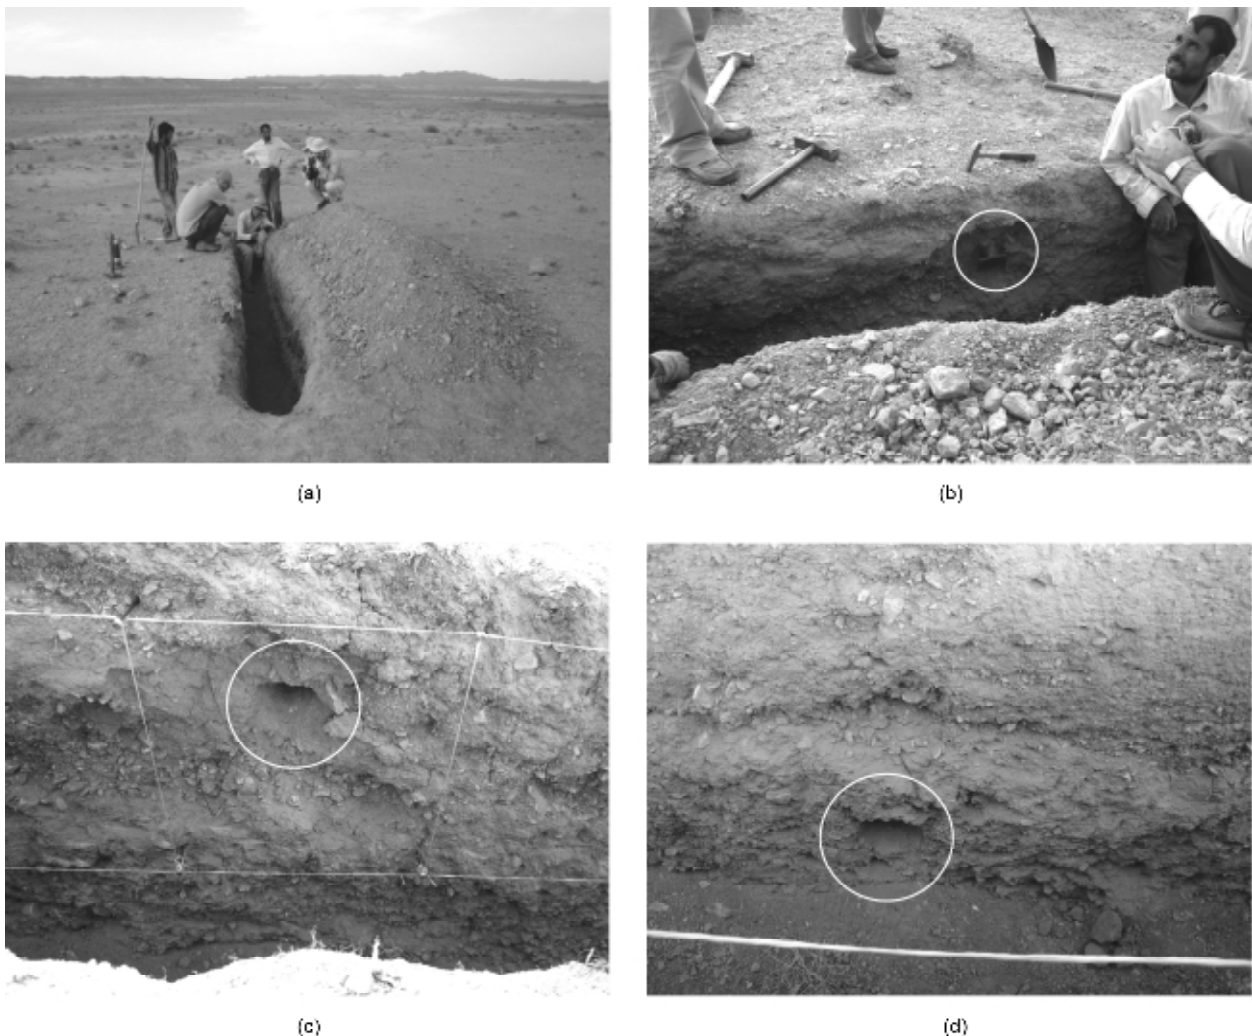

**Figure 5.** (a) The trench over the surface of Qanat shaft in Dasht-e-Bayaz. The view is toward the north, and mountains are thrust uplifted, north of Dasht-e-Bayaz fault, as shown in Figure (1b). Location of (b) *Gh1*, (c) *Gh2* and (c) *Gh3* samples in the trench, as stratigraphy indicates.

thermo luminescence /optically stimulated luminescence (TL/OSL) system (fitted with a  $^{90}\text{Sr}/^{90}\text{Y}$  beta source delivering  $\sim 6\text{Gy/minute}$ ) equipped with an IR laser diode and blue LEDs as stimulation sources. OSL was detected using an Electron Tubes bialkaline PMT. Luminescence was measured through 7mm Hoya U-340 filters. Uranium, thorium and potassium concentrations were measured using Gamma spect, see Table (2). Annual dose was estimated as described in Fattahi et al [24] and Fattahi and Walker [25].

#### 4. Luminescence Characteristics

OSL is the light emitted due to the release of stored energy accumulated in crystalline materials through ionising radiation from natural radioactivity. This method dates the last sunlight exposure event for mineral grains in sediment. When sediment is exposed to sunlight prior to deposition, the luminescence acquired over previous geological time is removed. The luminescence “clock” is thus set to zero. If all the signal is not removed, this is known as partial bleaching or partial removal of the signal. In many cases, it is not known how much of the signal is removed without extensive study. After burial, the OSL accumulates in response to natural ionising radiation (from radioactive isotopes in the Thorium and uranium decay chains and 40K, as well as from cosmic rays) received during the burial period of the sediment. Quartz and feldspar grains in the bulk sediment have different dosimetric properties. The level of OSL observed in these minerals is dependent on the absorbed radiation dose. For age determinations, two values are required: the equivalent dose  $D_e$  (which is the radiation level responsible for producing the luminescence signal) and the dose received by the mineral grains per year (during burial).

Over the past decade, the single aliquot regeneration SAR protocol [26] for quartz has been developed and used repeatedly to measure equivalent doses ( $D_e$ ) in quartz luminescence dating. The SAR procedure, see Table (3), depends on the assumption that it is possible to measure a signal

**Table 3.** Generalized single aliquot regenerated sequence.

Step	Treatment	Observed*
1	Give Dose	—
2	Pre-Heat	—
3	Stimulation	$L_x$
4	Give Test Dose	—
5	Pre-Heat	—
6	Stimulation	$T_x$
7	Return to 1	—

**Note:** In steps 2 and 5, the sample has been heated to the pre-heat temperature using TL and held at that temperature for 10s. In steps 3 and 6 OSL was measured at 125°C.

**\*Observed:**  $L_x$  and  $T_x$  are derived from the initial IRSL signal (5s) minus a background estimated from the last part of the stimulation curve. Corrected natural signal  $N = L_0/T_0$ ; Corrected regenerated signal  $R_x = L_x/T_x$  ( $x=1-5$ ).

after each dose and stimulation cycle, which acts as a surrogate measure of the sensitivity of the aliquot during the preceding measurement cycle. As such, any sensitivity changes which have occurred in the course of a regenerative analysis can be corrected for both the natural and regenerated signals. This protocol requires careful selection of the appropriate preheat and test doses used within it to ensure correct monitoring of sensitivity changes. The suitability of the samples for the SAR protocol was tested by examining its luminescence characteristics such as thermal transfer and dose sensitivity, through quality control procedures on the SAR data and via dose recovery tests [23, 27]. After testing the samples, they passed the basic assumptions of SAR method, and thus the  $D_e$  obtained using this method, see Table (3), for quartz can be considered robust and reliable.

#### 5. $D_e$ Determination and Age Calculation

Attention was initially focused on determining the  $D_e$  for samples Gh1 and Gh2 which should resolve more accurately the timing of the well maintenance and construction. The amount of the cleaned quartz for these samples was limited in quantity; however, making the results that are presented less precise


**Table 2.** The result of elemental concentrations for dose rate calculation.

Sample ID	Depth (m)	±	Water (%)	K (%)	±	U (ppm)	±	Th (ppm)	±	Cosmic (Gy/ka)	±
Gh1	0.5	0.5	5	0.88	0.051	1.63	0.13	5.63	0.41	0.165	0.056
Gh2	1	0.5	5	0.76	0.051	1.65	0.13	4.45	0.41	0.185	0.056
Gh3	1.5	0.5	5	0.8	0.051	1.6	0.13	5	0.41	0.207	0.056

than we would wish. Eleven and seventeen 8mm diameter aliquots were prepared and following measurement of the  $D_e$ , a dose-response curve was constructed from six regeneration dose points including four regenerative doses (12.5, 21, 33 and 66.6Gy), and a zero dose. A replicate measurement of the lowest regenerative dose was carried out at the end of each SAR cycle. The net initial OSL signal (first 0.5s - average of 40-60s) was used for natural, regenerated and test dose measurements. The  $D_e$  was determined by interpolation, and the sensitivity

was corrected by dividing  $L$  by  $T_x$ . The result of aliquots that produced no significant recuperation signals and produced recycling ratio between 0.90 and 1.15 were chosen for further  $D_e$  analysis and age determination. The range of  $D_e$  values are around 30 to 131Gy for Gh1, and 37 to 123 Gy for Gh2. Further information on SAR method could be found on Murray and Wintle [26].

Results of the replicate  $D_e$  data for samples Gh1 and Gh2 are shown in Figure (6) and Table (4). From plots, it is apparent that for Gh1 and Gh2 quartz

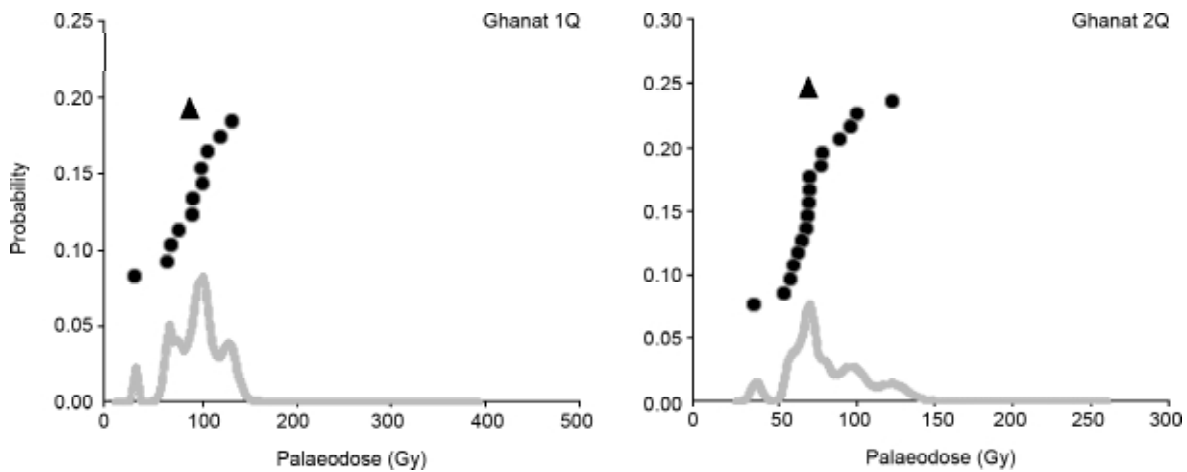

**Figure 6.**  $D_e$  distributions for samples Gh1 (left) and Gh2 (right) showing probability (P) density plots with individual aliquot  $D_e$  (paleodose) in Gy, plotted above (closed circles) and the arithmetic mean of the data (closed triangle).

**Table 4.** Values used to determine sample age and the derived age estimate for Gh1 and Gh2.

Sample ID	$D_e$ (Gy)	$\pm$	Total (Gy/ka)	$\pm$	Age (ka)	$\pm$
<b>All Data Gh1 (90-150) Quartz</b>						
Unweighted	88.86	28.13	1.89	0.16	47.1	15.5
Weighted	59.12	29.5	1.89	0.16	31.3	15.9
Probability	87.34	23.86	1.89	0.16	46.3	13.3
Central Age Model	83.42	9.79	1.89	0.16	44.2	6.6
<b>Minus outliers</b>						
Unweighted	94.76	21.29	1.89	0.16	50.2	12.2
Weighted	81.05	21.29	1.89	0.16	43.0	12.0
Probability	92.44	17.45	1.89	0.16	49.0	10.3
Central Age Model	92.59	6.39	1.89	0.16	49.1	5.6
<b>All Data Gh2 (90-150) Quartz</b>						
Unweighted	75.04	19.73	1.69	0.16	44.3	12.5
Weighted	67.58	12.31	1.69	0.16	39.9	8.3
Probability	70.4	10.72	1.69	0.16	41.6	7.6
Central Age Model	72.66	4.44	1.69	0.16	42.9	5.0
<b>Minus Outliers</b>						
Unweighted	70.44	9.16	1.69	0.16	41.6	6.8
Weighted	67.49	9.16	1.69	0.16	39.9	6.7
Probability	69.14	6.62	1.69	0.16	40.8	5.7
Central Age Model	69.85	2.38	1.69	0.16	41.2	4.4
<b>Minimum</b>						
Min. Gh1 (90-150) Quartz	29.83	1.21	1.89	0.16	15.8	1.6
Min. Gh2 (90-150) Quartz	37.42	2.53	1.69	0.16	22.1	2.7



samples there are, respectively, one and four outliers on the  $D_e$  distribution (outliers are defined as those  $D_e$  that are greater than the arithmetic mean of the data). We applied four different statistical approaches for calculating the suitable single  $D_e$  value for age determination [27]. Means based on unweighted values, weighted values (by inverse variance), combined probability values and the Central Age Model (CAM) produced mean  $D_e$  values in the range of  $59 \pm 29$  to  $89 \pm 28$  Gy for *Gh1* and  $68 \pm 12$  to  $75 \pm 20$  Gy for *Gh2*.

If statistical outliers are excluded (outside two standard deviations of the unweighted mean) the unweighted, weighted, combined probability, and CAM means changed significantly at  $81 \pm 21$  to  $95 \pm 21$  Gy for *Gh1* and  $69 \pm 7$  to  $70 \pm 9$  Gy for *Gh2*, see Table 4). These calculations result in ages that range from  $31 \pm 16$  to  $50 \pm 12$  ka for *Gh1* and  $40 \pm 8$  to  $44 \pm 12$  ka for *Gh2*, see Table (4). Although, we have not been able to extract sufficient quartz to provide an age for *Gh3*, the potassium feldspar age for *Gh3* using the CAM for  $D_e$  determination is  $9 \pm 1$  ka. This age is consistent with a quartz age of  $8.7 \pm 1.1$  ka calculated for a single sample of fine-grained fluvial silt that was collected from a depth of  $\sim 1.25$  m within the sediments in the surface of the Nimbluk plain [23], which is nearby and located just south of Khezri Dasht-e-Bayaz village. This is consistent with a partial bleaching stratigraphy, because *Gh3* is a paleosol sample that presumably did not interrupt by workers, covered with sediment from anthropogenic activity (other two layers), and the other two sediment samples were collected from deeper layers within the fan via digging a well shaft. However, if *Gh1* and *Gh2* had been completely reset during the construction or maintenance of the well as initially expected, these two samples should have provided younger ages than *Gh3*.

Given the depositional setting, the  $D_e$  distributions as shown in Figure (6), and the calculated ages using mean  $D_e$ , it is obvious that the anthropogenic samples were only partially bleached prior to being dug up and scattered on the surface. As measurements were conducted at the multi-grain level, multiple  $D_e$  populations within a sample will be largely masked [27-28], as OSL will come from a relatively few bright and poorly bleached grains on each aliquot. In this case, basing age calculations on a mean has led to an over-estimation of true

burial age. The probability plots each show a small peak at around 25 Gy (*Gh1*) to 40 Gy (*Gh2*), and these small peaks will be more intensively investigated when more quartz for OSL dating is obtained. These peaks represent grains which may have been exposed at the time of well digging or maintenance. If we assume that these grains are a more accurate reflection of the periods of interest we can then calculate minimum ages based on these  $D_e$  for *Gh1* and *Gh2*. The resulting ages are  $15.8 \pm 1.6$  ka and  $22.1 \pm 2.7$  ka, respectively. We speculate these ages are more likely to reflect construction and maintenance periods, though we think it is highly unlikely that such old ages are indicative of the ages of the Qanat systems.

## 6. Conclusion

The minimum ages of 14 to 17 ka for *Gh1* and 19 to 25 ka for *Gh2*, are much older than the estimated age for *Gh3* ( $\sim 9$  ka). This fact, combined with the widespread distribution of equivalent dose, proves that the vast majority of grains inside the *Gh1* and *Gh2* samples are partially bleached. In other words, very few of the grains were sufficiently exposed to light during construction and digging (around one minute fully bleaches these grains in laboratory tests). Therefore, the combination of different deposition and inherited ages from several hundred to several tens of thousands grains in one aliquot will provide an age that is only a mean of all these ages (each aliquot can contain up to 1500 grains). Even when the minimum age model is applied, the single aliquot ages are still greatly overestimating the true probable age.

An added complication is that the luminescence signal from these samples is dim; thus applying single grain analyses will be difficult due to the low OSL signal intensities. The single aliquot method to which dim samples were applied in the recent research is not an efficacious way to achieve the age of Qanats and may need to test for more samples. Therefore, a more extensive understanding of the equivalent dose distributions of the mixed grain populations is needed and is a subject of future study on Qanat sediments in Iran. Nevertheless, it appears that in spite of all these difficulties, the immediate direction and the most logical solution for accurately dating samples like *Gh1* and *Gh2* is to find dates on individual grains or experiment with luminescence on the potassium feldspar grains. Some combination of

these methods might also be appropriate. This paper shows our preliminary result and our experiments will continue to find more reliable results.

### Acknowledgements

We thank Mr. Hashemi (the driver) of the Geological Survey of Iran, Ms. H. Amini from the Institute of Geophysics of the University of Tehran for sample preparation. In particular, we thank the Mayors of the cities of Khezri and Dasht-e-Bayaz for their support. Special thanks to the four reviewers, who helped us to upgrade the quality and clarity of our paper.

We also thank the Oxford Luminescence Dating Laboratory of the Oxford University Centre for the Environment, the Geological Survey of Iran, the University of Birjand and the Institute of Geophysics of the University of Tehran which have supported our on-going research. This work was also made possible by grants from the Leverhulme Trust.

### References

- Walker, R. and Jackson, J. (2002). "Offset and Evolution of the Gowk Fault, S.E. Iran: A Major Intra-Continental Strike-Slip System", *Journal of Structural Geology*, **24**, 1677-1698.
- Jackson, J., Haines, J., and Holt, W. (1995). "The Accommodation of Arabia-Eurasia Plate Convergence in Iran", *Journal of Geophysical Research*, **100**(B8), 15205-15219.
- Walker, R.T. and Khatib, M.M. (2006). "Active Faulting in the Birjand Region of NE Iran", *Tectonics*, **25**(TC4016), doi: 10.1029/2005TC001871.
- Vernant, Ph., Nilforoushan, F., Hatzfeld, D., Abbassi, M. R., Vigny, C., Masson, F., Nankali, H., Martinod, G., Ashtiani, A., Bayer, R., Tavakoli, F., and Chery, J. (2004). "Present-Day Crustal Deformation and Plate Kinematics in the Middle East Constrained by GPS Measurements in Iran and Northern Oman", *Geophys. J. Int.*, **157**, 381-398.
- Walker, R., Jackson, J., and Baker, C. (2004). "Active Faulting And Seismicity of the Dasht-e-Bayaz Region, Eastern Iran", *Geophys. J. Int.*, **157**, 265-282.
- Kurushin, R.A., Bayasgalan, A., Olziybat, M., Enhtuvshin, B., Molnar, P., Bayarsayhan, Ch., Hudnut, K.W., and Lin, J. (1997). "The Surface Rupture of the 1957 Gobi-Altay, Mongolia, Earthquake", *Geol. Soc. Am. Spec. Paper*, 320p.
- Jackson, J. and Mckenzie, D. (1984). "Active Tectonics of the Alpine-Himalayan Belt Between Western Turkey and Pakistan", *Geophys. J. R. Astr. Soc.*, **77**, 185-264.
- Ambraseys, N.N. and Melville, C.P. (1982). "A History of Persian Earthquakes", Cambridge University Press, UK.
- Ambraseys, N.N. and Tchalenko, J.S. (1969). "The Dasht-e-Bayaz (Iran) Earthquake of August 31, 1968: A Field Report", *Bull. Seism. Soc. Am.*, **59**, 1751-1792.
- Tchalenko, J.S. and Berberian, M. (1975). "Dasht-e-Bayaz Fault, Iran: Earthquake and Earlier Related Structures in Bed Rock", *Geological Society of America Bulletin*, **86**, 703-709.
- Balakina, L.M., Zakharova, A.I., Moskvina, A.G., and Chepkunas, L.S. (1996). "Focal Mechanisms of the Largest 1968-1979 Earthquakes in the Northern Lut Zone, Iran, and Their Geological Interpretation", *Physics of the Solid Earth, English Transl.*, **31**(6), 471-483.
- Struckmeier, W.F., Gilbrich, W.H., Richts, A., and Zaepke, M. (2004). "Groundwater Resources of the World", Abstract Special Edition for the 32<sup>nd</sup> International Geological Congress, Florence, Italy.
- Wulff, H.E. (1968). "The Qanats of Iran", *Sci. Am.*, **218**, 94-105.
- Salih, A. (2006). "Qanats a Unique Groundwater Management Tool in Arid Regions: The Case of Bam Region in Iran", Abstract (Invited) for International Symposium On Groundwater Sustainability (ISGWAS), 79-87, Alicante, Spain.
- Jackson, J. (2006). "Fatal Attraction: Living with Earthquakes, The Growth of Villages into Megacities, and Earthquake Vulnerability in the Modern World", *Phil. Trans. R. Soc. A*, **364**, 1911-1925.
- Beaumont, P. (1968). "Qanats on the Varamin Plain, Iran", *Trans. Inst. Of Brit. Geogs. Pub.*,

- 45, 169-179.
17. English, P.W. (1968). "The Origin and Spread of Qanats in the Old World", *Proc. of the Am. Philosophical Society*, **112**, 170-181.
18. Beaumont, P. (1971). "Qanat Systems in Iran", *Bull. of the International Association of Scientific Hydrology*, **XVI**(1), 39-50.
19. Issar, A. (1969). "The Groundwater Provinces of Iran", *Bull. of the International Association of Scientific Hydrology*, **XIV**(1), 87-99.
20. Yazdi, M.H.P. (2000). "Qanat and its Economic Value", Abstract for International Symposium of Qanat, Yazd, Iran, 9-21 (in Persian).
21. De Martini, P.M., Hessami, K., Pantosti, D., D' Addezio, G., Alinaghi, H., and Ghafory-Ashtiani, M. (1998). "A Geologic Contribution to the Evaluation Of the Seismic Potential of the Kahrizak Fault (Tehran, Iran)", *Tectonophysics*, **287**, 187-199.
22. Hessami, K., Pantosti, D., Tabassi, H., Shabanian, E., Abbassi, M.R., Fegghi, Kh., and Solaymani, Sh. (2003). "Paleoearthquakes and Slip Rates of the North Tabriz Fault, NW Iran: Preliminary Results", *Annals of Geophysics*, **46**(5), 903-915.
23. Fattahi, M. (2003). "Recent Developments in Luminescence Dating", *Iranian Int. J. Sci.*, **4**(1), 57-72.
24. Fattahi, M., Walker, R., Hollingsworth, J., Bahroudi, A., Nazari, H., Talebian, M., Armitage, S., and Stokes, S. (2006). "Holocene Slip-Rate on the Sabzevar Thrust Fault, NE Iran, Determined Using Optically Stimulated Luminescence (OSL)", *Earth and Planetary Science Letters*, **245**, 673-684.
25. Fattahi, M. and Walker, R. (2007). "Luminescence Dating of the Last Earthquake of the Sabzevar Thrust Fault, NE Iran", *Quaternary Geochronology*, **2**, 284-289.
26. Murray, A.S. and Wintle, A.G. (2000). "Luminescence Dating of Quartz Using an Improved Single-Aliquot Regenerative-Dose Protocol", *Radiation Measurements*, **32**(1), 57-73.
27. Fattahi, M., Nazari, H., Bateman, M.D., Meyer, B., Sebrier, M., Talebian, M., Le Dortz, K., Foroutan, M., Ahmadi Givi, F., and Ghorashi, M. (2009). "Refining the Age of the Last Earthquake on the Dehshir Fault, Central Iran", *Quaternary Geochronology*, Doi: 10.1016/J.Quageo.2009.04.005.
28. Bateman, M.D., Frederick, C.D., Jaiswal, M.K., and Singhvi, A.K. (2003). "Investigations into the Potential Effects of Pedoturbation on Luminescence Dating", *Quaternary Science Reviews*, **22**, 1169-1176.